



**BLACKSHOW
AFRICA**


POWER TRANSMISSION PARTS

Spare parts in-stock when you need them

Cone Ring Coupling



www.blackshowafrica.co.za

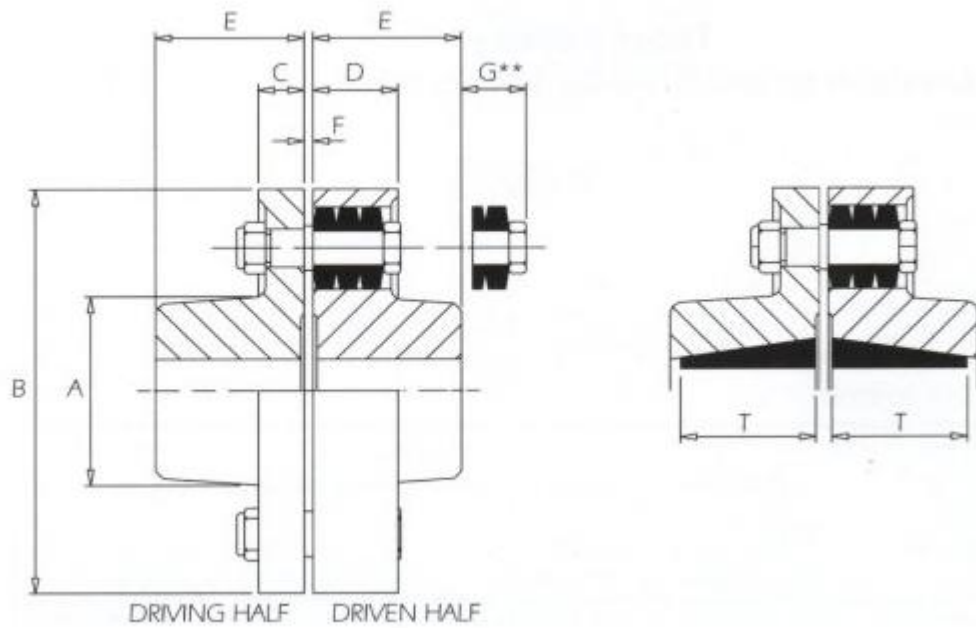

Coupling size column entry 5 & 6	Types 611 & 612 Straight bored					Types 613 & 614 Taper bushed					A	B	C	D	F
	Max. bore	Min. bore *		Hub length E	G **	Max. bore	Min. bore	Hub length E	Bush length T	G **					
		Driving half	Driven half												
01	38	*	19	48	20	25	9	40	22.3	28	64	134	12	26	3
02	42	*	22	56	12	Not available as taper bushed					70	147	12	26	3
03	48	*	25	61	26	40	14	50	38.1	37	83	171	19	35	3
04	60	*	28	68	19	Not available as taper bushed					97	193	19	35	3
05	70	*	32	76	11	60	16	50	44.5	37	117	215	19	35	3
06	80	28	42	88	46	Not available as taper bushed					127	254	31	56	3
07	90	35	55	100	34	75	35	82	76.2	52	147	279	31	56	3
08	100	40	60	117	22	90	35	98	88.9	41	180	330	31	61	3
09	120	50	65	132	45	110	55	124	114.3	53	206	371	46	81	6
10	140	80		147	30	125	70	136	127	41	230	419	46	81	6
11	150	90		165	12	Not available as taper bushed					256	457	46	81	6
12	170	100		188	0						296	533	46	81	6
13	180	As required		211	28						330	597	104	109	6

14	200		236	10		368	660	104	109	6
15	230		264	43		406	737	140	140	6
16	255		292	15		457	826	140	140	6
17	280		311	0		508	927	140	140	6
18	305		324	0		533	991	140	140	6
19	330		330	0		572	1067	140	140	6
20	355		356	0		610	1156	140	140	6

Notes:

* Up to size 05 the driving half hubs are solid

** The coupling pin withdrawal distance

Notes: (for sizes 13 to 20 only)

The above dimensions are for guidance only